



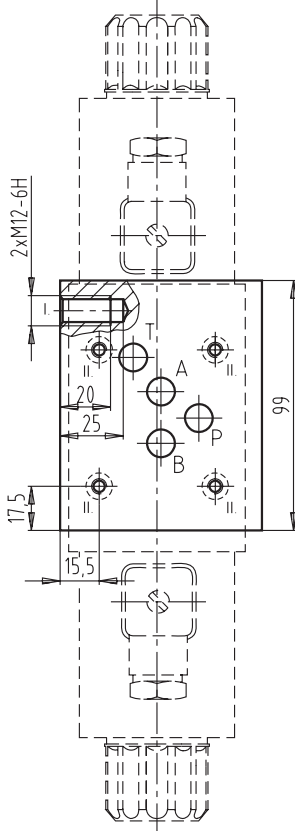


# Plate Dimensions

Dimensions in millimetres


## Plates with 1 section

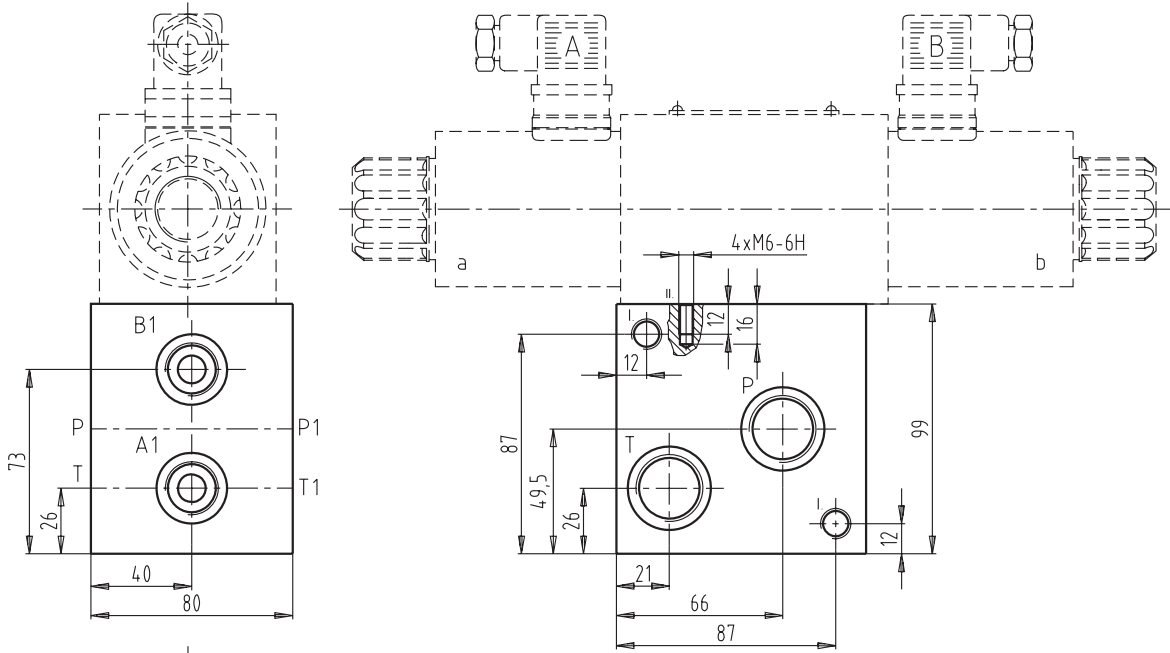



**P, T, P1, T1**



**A, B**



### Installation dimensions

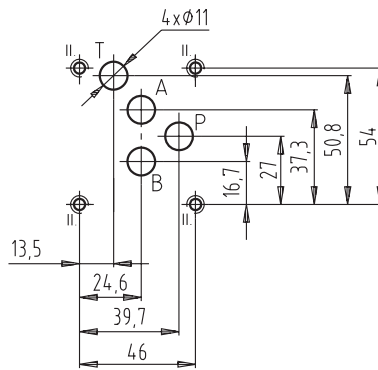


Port	A, B	P, T, P1, T1
Thread	G1/2	G3/4
Depth of thread	15	17
Counterbore	Ø28	Ø33
Depth of counterbore	0.5	0.5

# Plate Dimensions

Dimensions in millimetres

## Plates with 2 ... 6 sections

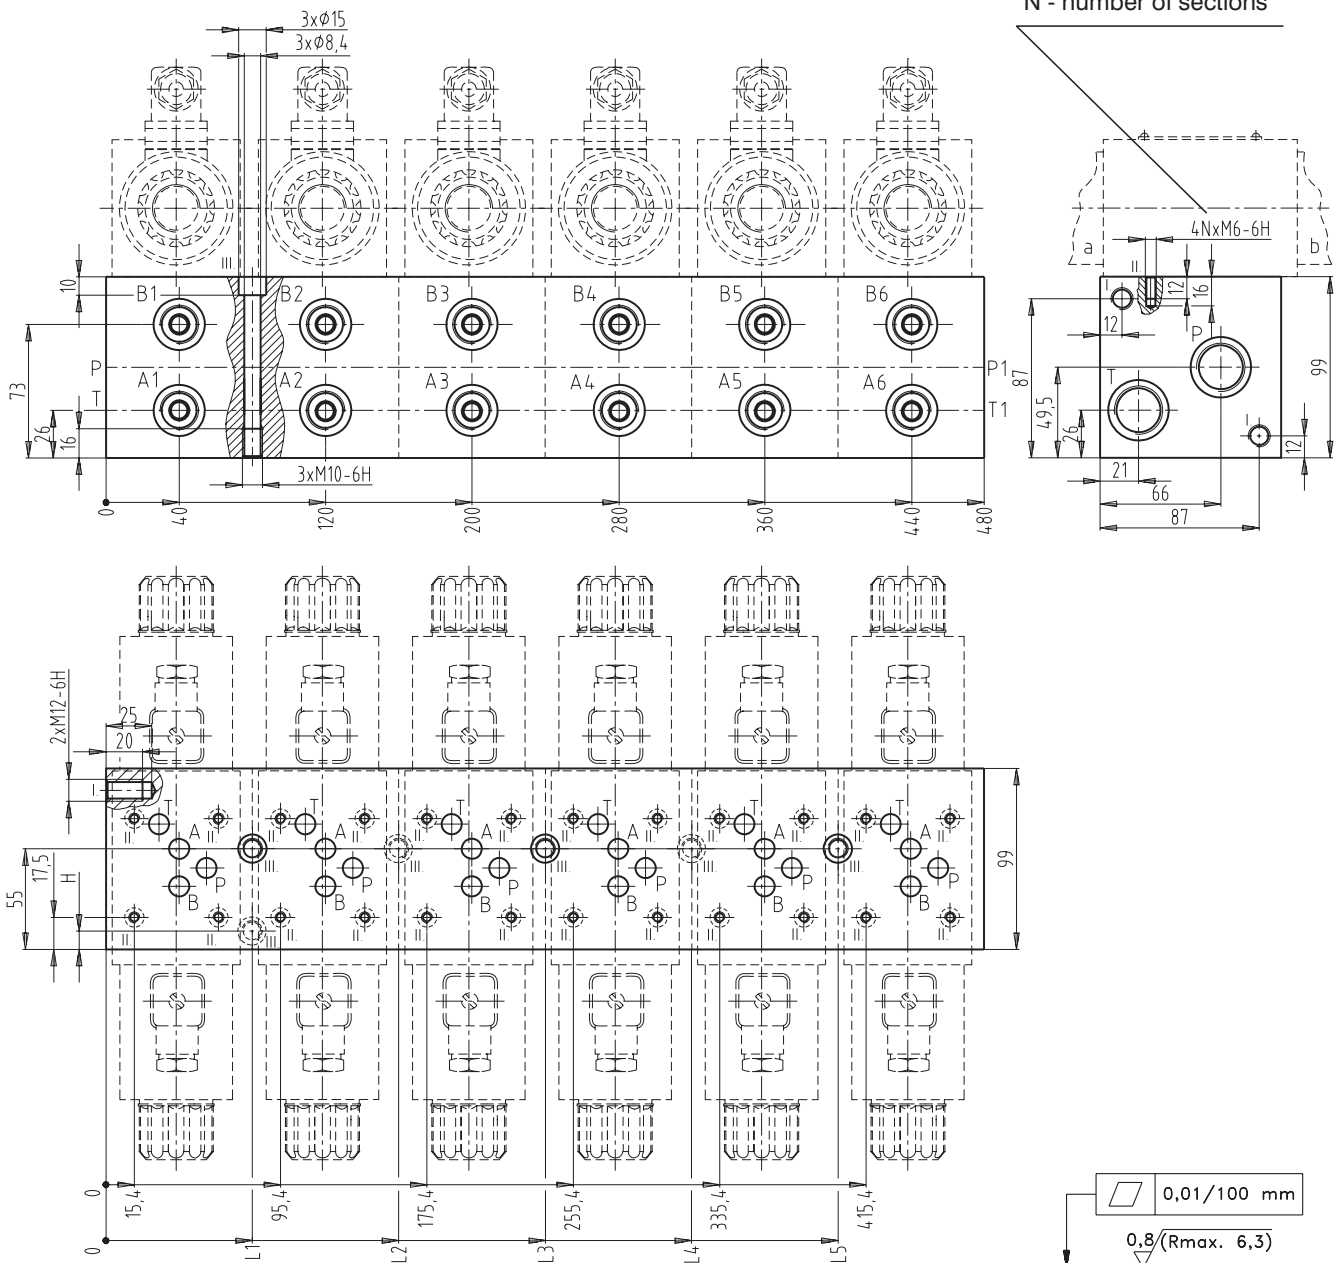

0,01/100 mm  
 0,8 (Rmax. 6,3)  
 Required surface finish of interface

Number of sections	L1	L2	L3	L4	L5	H
2	80	-	-	-	-	10
3	80	160	-	-	-	-
4	80	-	240	-	-	-
5	80	-	240	320	-	-
6	80	-	240	-	400	-
<b>Port</b>		<b>A1...A6, B1...B6</b>			<b>P, T, P1, T1</b>	
Thread		G1/2			G3/4	
Depth of thread		15			17	
Counterbore		Ø28			Ø33	
Depth of counterbore		0.5			0.5)	

## Caution!

- The packing foil is recyclable.
- The technical information regarding the product presented in this catalogue is for descriptive purposes only. It should not be construed in any case as a guaranteed representation of the product properties in the sense of the law.

ARGO-HYTOS s.r.o. CZ - 543 15 Vrchlabí  
Tel.: +420-499-403111, Fax: +420-499-403421  
E-mail: sales.cz@argo-hytos.com  
www.argo-hytos.com